Notes:

1. All dimensions are in inches.
2. All wind load deflection testing completed with Tell LC2400 lockset/ DB2051 Deadbolt or Tell 8300 Exit Device/ CTL Lever Trim.
3. Threshold sealed to jamb with non-structural sealant.
4. Seal (detail 12) applied to face of soffit.
5. Assembly is to be anchored or secured to spruce/ pine/ fir frame with #10x1" long wood screws. See anchor spacing on page 5.
6. Doors are not approved to be installed in areas requiring water penetration resistance.
7. Door models with 10" x 10" light kit require protection if installed in wind-borne debris regions.
8. Rough opening size: 36 x 80".

Design Pressure tested to ASTM E330. Wind zone ratings calculated from IBC requirements and are for reference only. Follow all local and state code requirements specific to your application.

Design Pressure Rating				Wind Zone Rating (mph)			
		Design Pressure (psf)		Exposure B		Exposure C	
Light Kit	Hardware	+	-	Zone 4	Zone 5	Zone 4	Zone 5
none	Lockset w Deadbolt	+56	-73	170	170	150	150
none	Exit Device (Panic Bar)	+56	-45	150	140	140	120
10x10	Lockset w Deadbolt	+56	-61	170	150	150	140
10x10	Exit Device (Panic Bar)	+41	-37	140	120	120	110

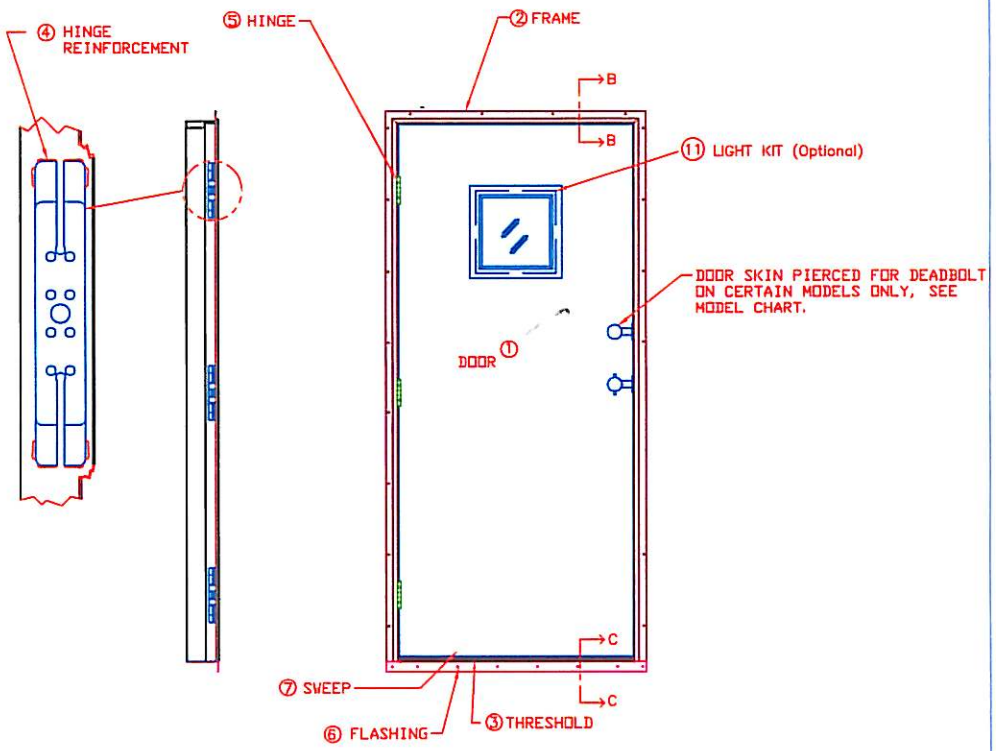



FLASHING INSTALLED WITH DT100179 THRESHOLD

Florida Approval: FL9277

REVISIONS	
	0
REV 3	

TELL MANUFACTURING, INC	TELSTAR DOOR MD100000 SERIES	SEE TAB
	M. ALEXANDER	C MD100000 3