

(PATENT PENDING)

TELSTAR DOOR

- Pre-hung door and frame assembly*
- 161 lock prep*
- Deadbolt ready*
- ADA compliant threshold*
- Sweep and seal*
- Threshold flashing detaches for optional installation*
- Door reinforced for closer*
- Insulated core*
- Left or right hand reverse hinge*
- 20 gauge galvanized door*
- 18 gauge galvanized frame*
- Ball bearing, non-removable pin hinge*



3 COLORS Available:



Actual colors may vary from those shown due to limitations of the production process.

DETACHABLE THRESHOLD FLASHING



**ASA
STRIKE
PREP**

**WITH or WITHOUT
10 X 10 LITE KIT**

**INVISIBLE
DEADBOLT
PREP**

(Shown without blank plate)

**TAMPER
RESISTANT
HINGE**



**ADA COMPLIANT
THRESHOLD**

FOAM CORE


**LOCKSET &
DEADBOLT
READY**

**DOOR REINFORCED FOR
CLOSER**



SOON AVAILABLE IN **3** SIZES! LARGER TELSTAR DOOR AVAILABLE SOON!

WALL SECTION

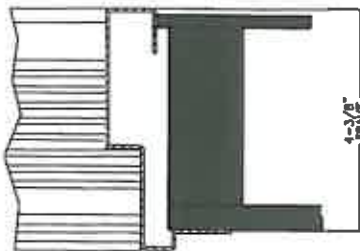

SPECIFICATIONS:

	TELSTAR*	TELSTAR PRO	TELSTAR 70 PRO
Rough Opening Information:	36" x 80"	38" x 81"	38" x 85"
Door Size:	34-1/2" x 79" x 1-3/4"	35-3/4" x 79-1/8" (3068)	35-3/4" x 83-1/8" (3070)
Exterior Surface Flange:	38-1/2" x 82-3/4" (81-1/4" without threshold flashing)	40-3/8" x 83-5/8" (82-1/4" without threshold flashing)	40-3/8" x 87-5/8" (86-1/4" without threshold flashing)
Interior Wall Overall Frame Size:	35-5/8" x 79-3/4"	37-3/8" x 80-1/2"	37-3/8" x 84-1/2"

*WIND RATED

Door Worx 2009

CORPORATE HEADQUARTERS: 18 Richard Drive, Lititz, PA 17543. PHONE 1-717-735-6770. FAX 1-717-626-5652

OTHER REGIONAL OFFICES: INDIANA

www.doorworx.com


TELSTAR WIND RATING / FLORIDA APPROVAL: FL9277 (34-1/2" X 79" DOOR)

Notes:

1. All dimensions are in inches.
2. All wind load deflection testing completed with Tell LC2400 lockset/ DB2051 Deadbolt or Tell 8300 Exit Device/ CTL Lever Trim.
3. Threshold sealed to jamb with non-structural sealant.
4. Seal (detail 12) applied to face of soffit.
5. Assembly is to be anchored or secured to spruce/ pine/ fir frame with #10x1" long wood screws. See anchor spacing on page 6.
6. Doors are not approved to be installed in areas requiring water penetration resistance.
7. Door models with 10" x 10" light kit require protection if installed in wind-borne debris regions.
8. Rough opening size: 36 x 80".

Design Pressure tested to ASTM E330. Wind zone ratings calculated from IBC requirements and are for reference only. Follow all local and state code requirements specific to your application.

Design Pressure Rating		Design Pressure (psf)		Wind Zone Rating (mph)			
Light Kit	Hardware	+	-	Exposure B		Exposure C	
				Zone 4	Zone 5	Zone 4	Zone 5
none	Lockset w Deadbolt	+58	-73	170	170	150	150
none	Exit Device (Panic Bar)	+58	-43	150	140	140	120
10x10	Lockset w Deadbolt	+58	-61	170	150	150	140
10x10	Exit Device (Panic Bar)	+41	-37	140	120	120	110

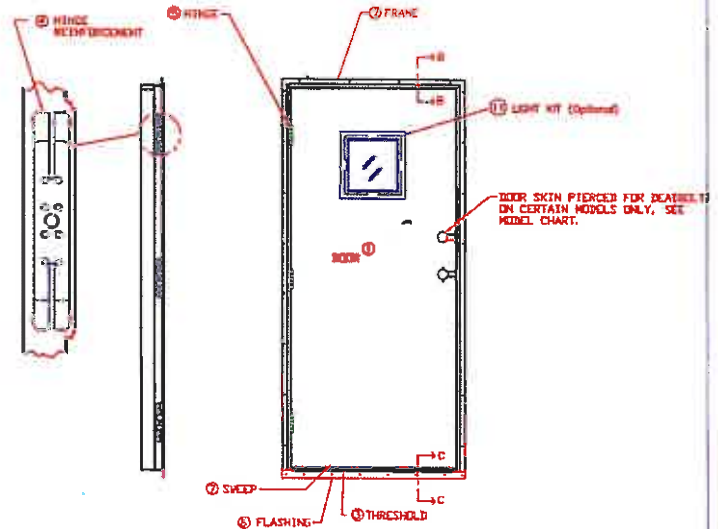

FLASHING INSTALLED WITH DT100175 THRESHOLD

Florida Approval: FL9277

TELSTAR DOOR M0100000 SERIES			
Model	Material	Finish	Color
M0100000	Steel	Black	Black
TELSTAR DOOR M0100000 SERIES			3

LINK / INSTRUCTIONS TO TELL'S APPROVAL LISTING

Please follow this link:

http://www.floridabuilding.org/pr/pr_app_srch.aspx

Next, please type in Tell Manufacturing's approval number (FL#): FL9277.

This will bring up Tell's specific product approval page.

On this page, if Tell's approval number is clicked on again (lower left hand corner), more detailed information will show.

Door Worx 2009

CORPORATE HEADQUARTERS: 18 Richard Drive, Lititz, PA 17543 . PHONE 1-717-735-6770 . FAX 1-717-626-5652

OTHER REGIONAL OFFICES: INDIANA

www.doorworx.com